



# Installation Instructions

Rear Netting

DD-N-JK4-07R

Jeep JK unlimited 2007-up

J4NN07RC\*\*

VIDEO INSTALLATION INSTRUCTIONS AVAILABLE AT:  
[WWW.DIRTYDOG4X4.COM](http://WWW.DIRTYDOG4X4.COM)



-Thank you for purchasing a Dirtydog 4x4 netting system. Please read these instructions fully to familiarize yourself with the installation. You should have 3 main pieces. Right side, left side, and backside. Set aside 30 minutes for the first time you install your netting. Installation is done easiest with the hard top removed. The soft top can be opened or closed.

## Step 1

Start with the back piece first. Install the short straps on the side roll bars first. For correct positioning the fifth strap from the bottom attaches at the top of the roll bar.(arrow) Each additional strap installs down the roll bar. The last strap connects top the sides once they are installed.



Slide each half of the tailgate bar in the last row as shown in the photo. This bar will connect at the center of the net and then the whole bar is clipped into soft-top tailgate clips. (Clips can be purchased from us or your local dealer.) This last row is optional and can be cut off if not needed.

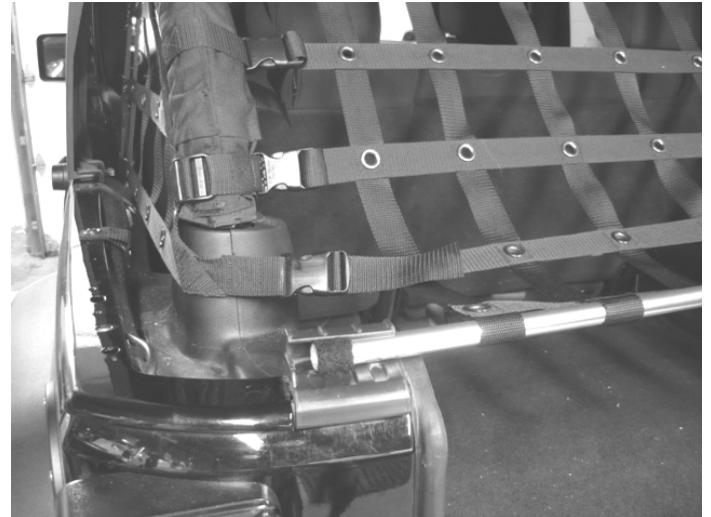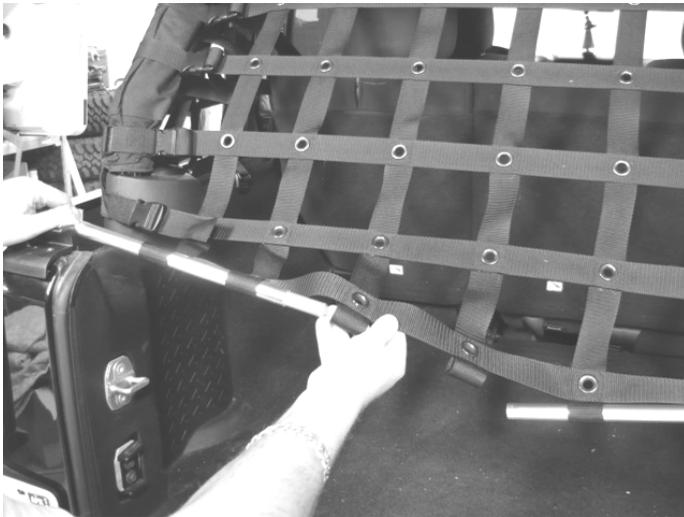


The strap at the very top of the rear piece wraps around the top of the vertical roll bar comes toward the outside wraps back around and connects into the ladderloc clip. See photo




## STEP 2

Start with either side. There are 5 rings that attach with straps. Two rings attach sharing the straps you already (see arrows) installed on the rear section. You will have to loosen them off and install the loops and re-snug. The second ring from the bottom uses the 16" strap provided

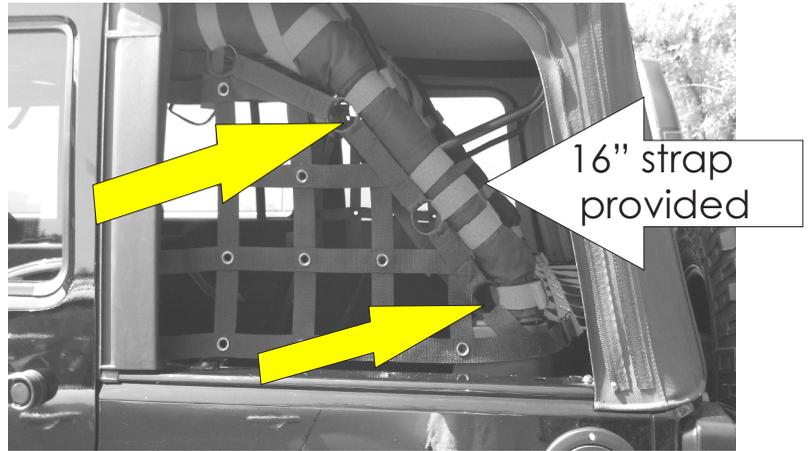

The remaining rings install using the 18" straps provided. These wrap around the top roll bar

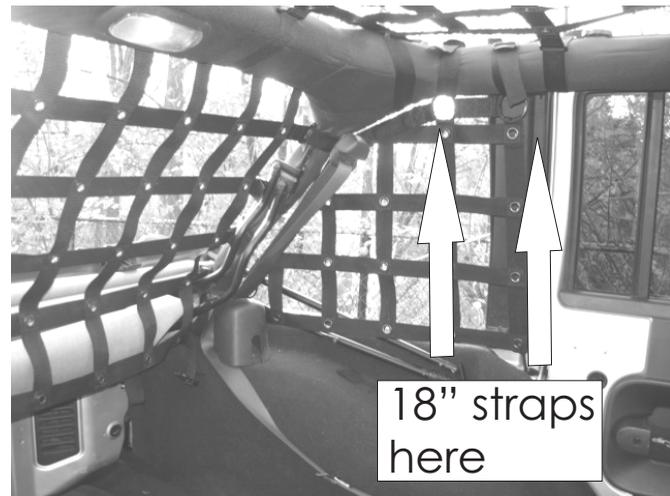

To install the bottom strap you need to pull back the carpeting from the rear quarter panel. Pass the webbing through the bracket as shown and connect into ladderloc on side net.



Rear corner of the side gets clipped into the buckle off the back piece.



Any excess straps that hang out can be tucked in under it's self. Adjust and tighten straps as needed to even out the net so it is positioned properly. Your net comes with a 3 year warranty against manufacturing defects. Cuts, abrasions, sun faded items are not covered under the warranty.

Dirtydog 4x4  
Mississauga, ON  
Canada  
1.855-704-0708  
Question? Call or email [orderdesk@dirtydog4x4.com](mailto:orderdesk@dirtydog4x4.com)