



Installation Instructions


J4PD07R1**

DD-P-JKR-07


REAR PET DIVIDER FOR JK
UNLIMITED 2007-UP

-Thank you for purchasing a Dirtydog 4x4 netting system. Please read these instructions fully to familiarize yourself with the installation. Set aside 15 minutes for the first time you install your pet divider.


Start with top of the pet divider that has all of the velcro closures on it. (The dirtydog logo faces the front of the truck.) The second and third strap in on each side will help you attain proper positioning. These two fit into the corners where the roll bars meet. Do this on both side then install the balance of the straps on the rear over head roll bar.

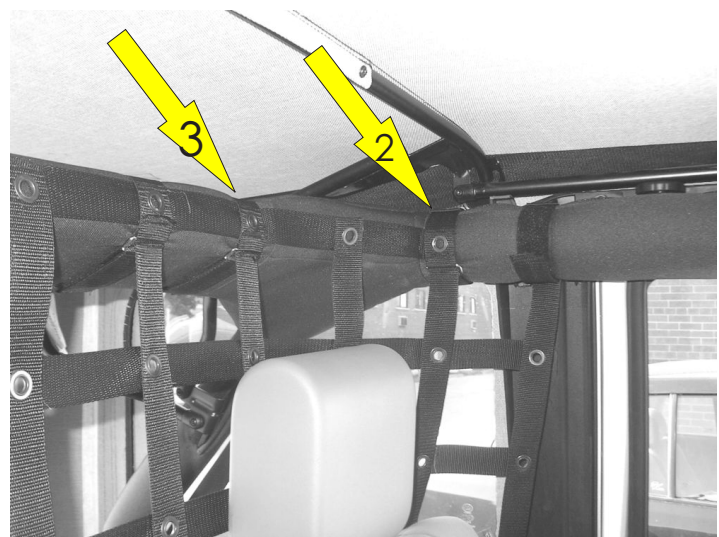

The first velcro straps on the ends can be attach to the roll bar next. These straps installed slightly differently. The strap wraps around the roll bar from the outside. Position this strap so the rows are aligned straight. This strap needs to be tight so it does not move.

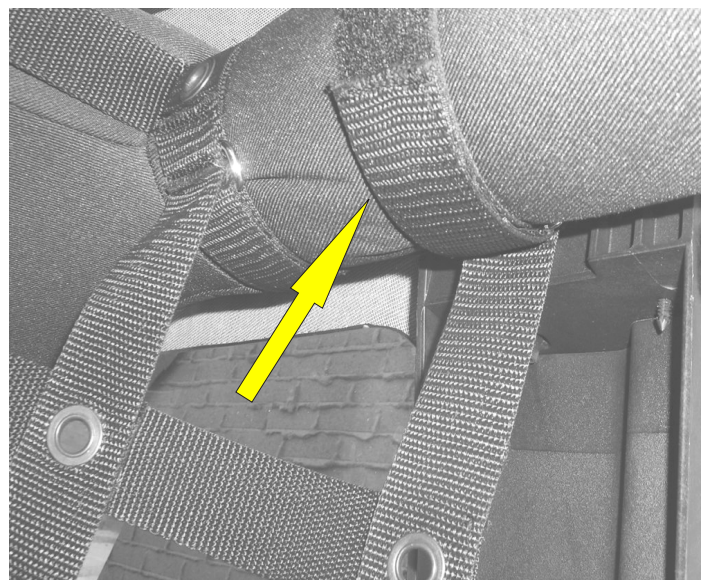

Once all the top straps are installed. You will now install the bottom corners. These are installed using the 20 inch straps provided. These strap pass through the bottom corner grommets and will then wrap around the striker bar on the door as shown. Pull sides equally so the pet divider is installed evenly. Be sure to pull the seatbelts forward before attaching the straps to the striker bar

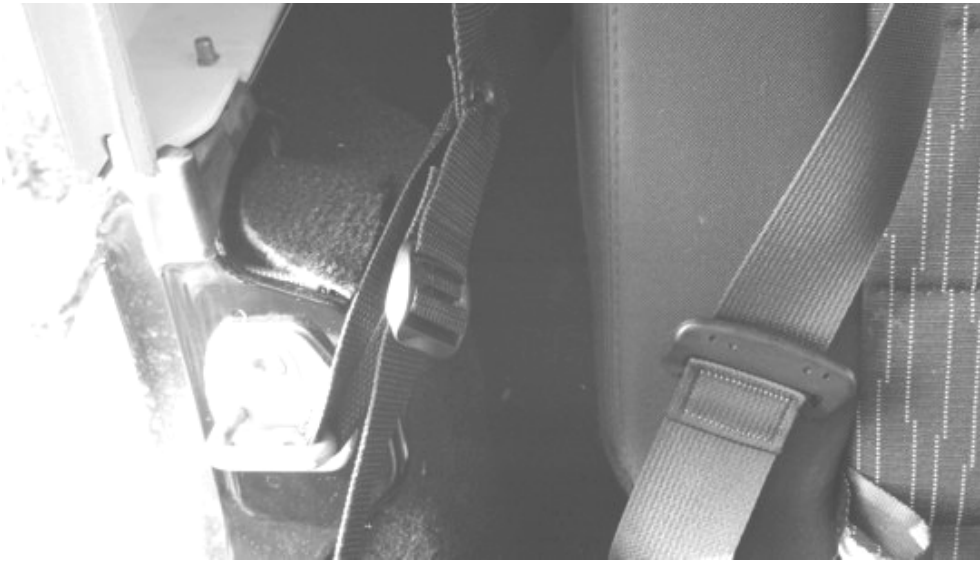

Adjust and tighten straps as needed to even out the net so it is positioned properly. Your pet divider comes with a 3 year warranty against manufacturing defects. Cuts, abrasions, sun faded items are not covered under the warranty.

Dirtydog 4x4
Mississauga, ON
Canada
1-855-704-0708
Question? Call or email orderdesk@dirtydog4x4.com