



Installation Instructions

NETTING FOR JEEP YJ 1992-95

DD-N-YJ-92

-Thank you for purchasing a Dirtydog 4x4 netting system. Please read these instructions fully to familiarize yourself with the installation. You should have 3 main pieces. Right side, left side, and backside. Set aside 60 minutes for the first time you install your netting. Installation is done easiest with the hard top removed. The soft top

Start with either the left or right side. Both sides are the same and interchangeable. Use the contents sheet to identify the pieces. The sides install with the nylon ladderlocs facing inward. Install the back bottom corner strap first. (Slide female side of the buckle on the strap before installing.) It will sit just above the seatbelt mechanism. The straps wrap around the roll bar and connect into the nylon ladderloc on the inside. Loosely install



Install the net on the inside of the soft top bars.

Complete this process for both sides and adjust all straps to center the net between the bars



The next step is to install the back side. Start at the back and install the 8 buckles. Once all 8 are snapped in adjust the tension so the net is centered and evenly spaced.



Continue with installing the balance of the straps along the top of your truck.



Your net comes with a 3 year warranty against manufacturing defects. Cuts, abrasions, sun faded items are not covered under the warranty.


Dirtydog 4x4
3045 Southcreek Road
Mississauga, ON
Canada
1-855-704-0708
Question? Call or email orderdesk@dirtydog4x4.com



1992-95 Jeep YJ


Contents

LADDERLOCKS FACE INSIDE VEHICLE

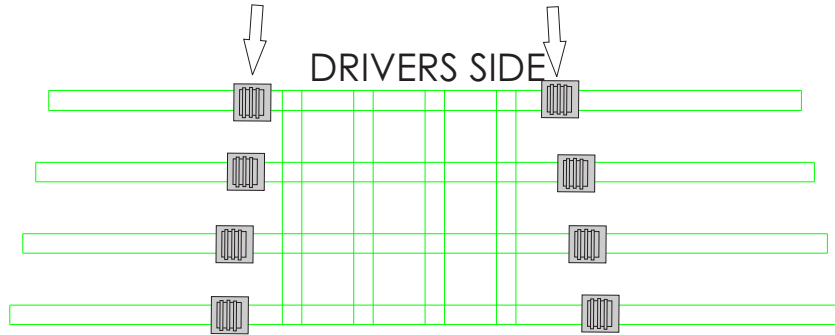


PASSENGER SIDE

INSTALL
FEMALE SIDE
BUCKLES

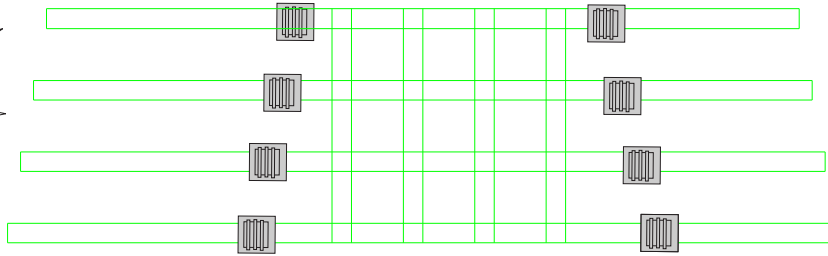

LADDERLOCKS FACE OUTSIDE VEHICLE

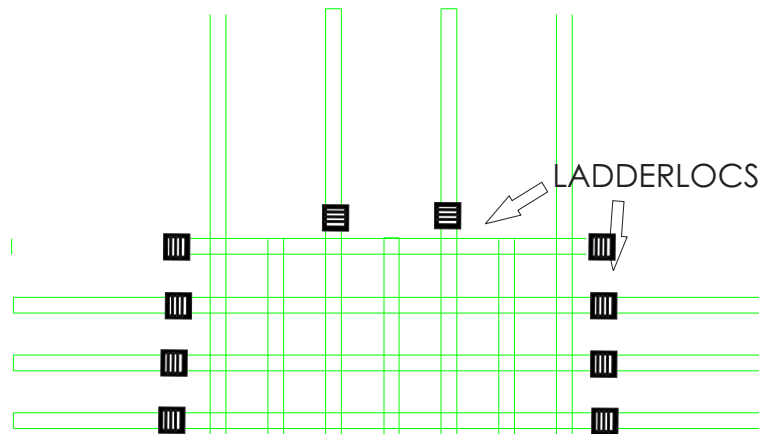

MALE SIDE OF BUCKLES



MALE SIDE OF BUCKLES

